



## Micro-X, the TES X-ray Imaging Rocket: First Year Progress

P. Wikus<sup>1</sup>, J. M. Rutherford<sup>2</sup>, J. Adams<sup>3,4</sup>, Y. Bagdasarova<sup>5</sup>, S. R. Bandler<sup>3,4</sup>, M. Bautz<sup>1</sup>, K. Boyce<sup>1</sup>, G. Brown<sup>5</sup>, S. Deiker<sup>6</sup>, W. B. Doriese<sup>7</sup>, E. Figueroa-Feliciano<sup>1,2</sup>, K. Flanagan<sup>1</sup>, M. Galeazzi<sup>8</sup>, G. C. Hilton<sup>7</sup>, U. Hwang<sup>3,11</sup>, K. D. Irwin<sup>7</sup>, R. L. Kelley<sup>3</sup>, T. Kallman<sup>3</sup>, C. A. Kilbourne<sup>3</sup>, S. Kissel<sup>1</sup>, S. W. Leman<sup>1</sup>, A. Levine<sup>1</sup>, M. Loewenstein<sup>3</sup>, D. Martinez-Galarce<sup>9</sup>, R. Mushotzky<sup>3</sup>, D. McCammon<sup>9</sup>, D. Najjar<sup>3</sup>, R. Petre<sup>3</sup>, F.S. Porter<sup>3</sup>, C. D. Reintsema<sup>7</sup>, T. Saab<sup>10</sup>, N. Schulz<sup>1</sup>, P. Serlemitsos<sup>3</sup>, R. Smith<sup>3,11</sup>, J. N. Ullom<sup>7</sup> and K. Yoha<sup>10</sup>

<sup>1</sup>MIT Kavli Institute for Astrophysics and Space Research  
<sup>2</sup>Massachusetts Institute of Technology  
<sup>3</sup>NASA Goddard Space Flight Center  
<sup>4</sup>University of Maryland  
<sup>5</sup>Lawrence Livermore National Laboratory  
<sup>6</sup>Lockheed Martin Solar and Astrophysics Laboratory

<sup>7</sup>National Institute of Standards and Technology  
<sup>8</sup>University of Miami  
<sup>9</sup>University of Wisconsin-Madison  
<sup>10</sup>University of Florida  
<sup>11</sup>Johns Hopkins University

# Micro-X

## The High Resolution Microcalorimeter X-ray Imaging Rocket

### Introduction

The Micro-X sounding rocket will be the first space-borne instrument to use transition edge sensor (TES) microcalorimeters in astrophysical observations. Our technical goals are to demonstrate the excellent energy resolution of such devices outside of a laboratory environment, and to prove the technical feasibility of a flight-qualified X-ray imaging spectrometer based on TES technology. Our experiment will pioneer this promising technology for future large X-ray missions such as the joint International X-ray Observatory (IXO). NASA's sounding rocket program provides cost-effective platforms for such technology demonstrations. The science goal of the first flight will be to obtain an imaging spectrum of the Bright Eastern Knot of the Puppis-A supernova remnant with unprecedented energy resolution. We intend to utilize numerous plasma diagnostics to determine the thermodynamic and ionization state of the plasma, to search for line shifts and broadening associated with dynamic processes, and to seek evidence of ejecta enhancement.


### Micro-X Mission and System Design

A two-stage solid-rocket booster will launch the Micro-X telescope into a sub-orbital trajectory with an apogee of approximately 270 km in altitude. This trajectory will yield an observation time of 300 seconds above an altitude of 160 km. X-ray observations of astronomical sources have to be carried out at high altitudes as X-rays are attenuated in the atmosphere.

Due to the short observation time available, it will not be possible to cycle the adiabatic demagnetization refrigerator (ADR) in flight. The ADR will be cycled on the ground prior to launch, and must provide a stable heat sink at a tightly controlled temperature of 50 mK just seconds after powered flight. After powered flight, the Micro-X instrument will be pointed at the astronomical source to be observed. A hermetic shutter door, which protects the optics and the cryogenic system on the ground and during launch, will be opened at an altitude of 160 km, and the detector array will be exposed to the X-rays originating from the observation target. In addition, X-rays from an on-board calibration source will be shone on the detector to detect any possible gain drift during flight. Upon reentry, the shutter door will be closed and the payload will descend to the Earth's surface by parachute.

The telescope looks out through the instrument's aft end, which is exposed when the rocket motor is jettisoned after powered flight. The X-ray mirror is located directly behind the hermetic shutter door. The TES detector array is located in the focal plane of the optics inside the cryogenic system. A gate valve is used to open the vacuum enclosure of the cryogenic system once the instrument is in the vacuum of space. The room-temperature read-out electronics and the controls for the cryogenic system are accommodated at the front end of the instrument. Correct pointing of the instrument will be achieved with a ST5000 star tracker and a bi-level thrust attitude control system (ACS). The ACS will be supplied by NASA along with other standard sounding rocket payload items (such as a telemetry system, a boost guidance system, etc.), which will be stacked on top of the telescope.

Our collaboration is currently involved in the detailed system design, and prototyping and manufacturing of the first subsystems. 2009 will see the manufacturing and assembly of the actual flight hardware. System level testing and system characterization will occur in 2010. We plan our first flight for January 2011.

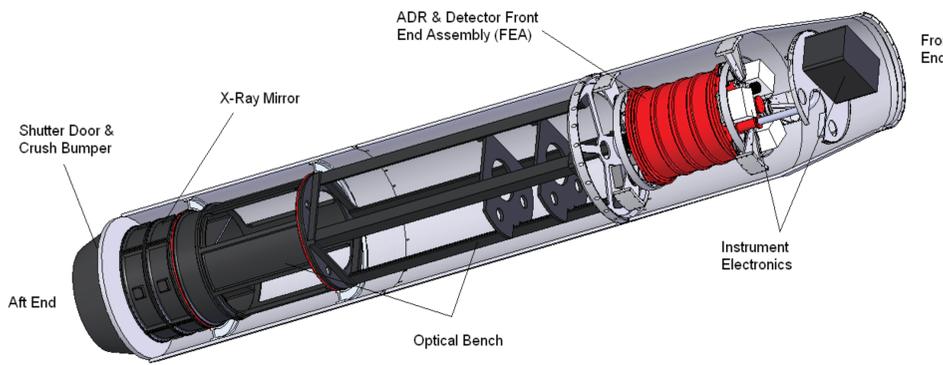

← Schematic of the Micro-X sounding rocket instrument. A mirror projects the X-rays onto the microcalorimeter array which is located inside an adiabatic demagnetization refrigerator (ADR). The control electronics are located close to the front end of the rocket. The total length of the instrument is 3.7 m.


The Micro-X flight only lasts a few minutes. A two-stage solid rocket motor launches the telescope into a suborbital trajectory, with an apogee of 270 km in altitude. Powered flight only lasts about a minute.

### The TES array and SQUID Multiplexing Read-Out System

The TES array is mounted to the cold stage of the ADR and consists of 11x11 pixels. Each pixel will cover 1.3 arcmin of the sky. The Micro-X detector array design will be based on the successful arrays developed for IXO by the NASA Goddard Space Flight Center (GSFC). The main differences are in size and speed.

In order to increase the field of view and better match the X-ray optics, the goal for the pixel pitch is 800 μm with an active pixel size of 700 μm. This initial planar design was found to suffer from a high-energy tail due to X-rays impinging directly on the TES instead of impinging on the absorber as desired. The size of the pixels for the Micro-X array will be maximized while keeping the resolution to 2 eV. To obtain this high resolution, low heat capacities per unit area are needed in the absorber. We also need the diffusion time to be quick to prevent dependence of the measured energy on the position where the photon impinged on the absorber. We are investigating 500-700 μm absorber designs that may have the required energy resolution. The time constant of the pixels is also an important design parameter. We are targeting an effective decay time of 2 ms for Micro-X. This long time constant will enable the SQUID multiplexer to read out all the pixels, enable more of the data to be relayed to ground, and decrease the effects of position dependence in the absorber. This long time constant will be achieved by slitting of the nitride membrane that serves as the weak thermal coupling between the pixel and the cold bath, reducing the thermal conductance.

The microcalorimeter array will be read out with a time division SQUID multiplexing system. The design of this multiplexer is based on an existing laboratory system. Micro-X will use two identical readout systems, each reading out one half of the detector array. Independent readout systems are a common sounding-rocket strategy for risk mitigation. Each of the two multiplexing systems consists of three SQUID stages. A group of four pixels will be read out simultaneously, with 32 bits of data being read for each pixel. Switching between the groups can be effected at a frequency of more than 1.56 MHz, yielding a Nyquist frequency of 48.8 kHz for each pixel. Due to the tight schedule of the Micro-X project, it was decided not to use triggering or on-board processing of the pulse data. Due to bandwidth limitations of the rocket's telemetry link, down-sampled data from a subset of the array will be radioed to ground while the full data stream will be stored on flash memory inside the rocket's electronics system and read out after the payload has been recovered.

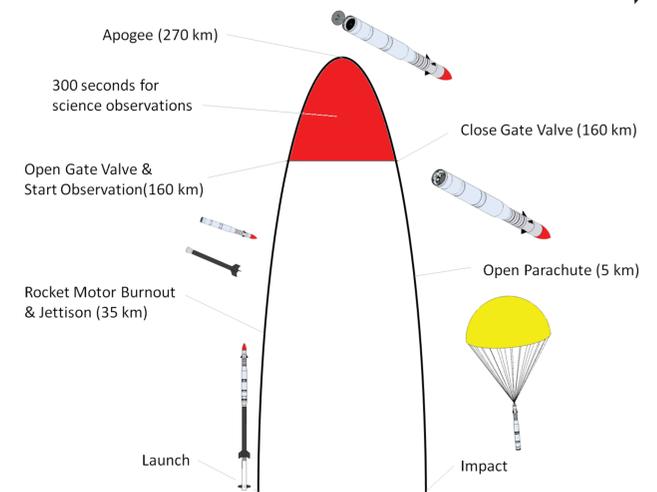


### The ADR and the Magnetic Shielding System

The ADR provides a stable temperature platform for the microcalorimeter array. The design of the Micro-X ADR has been optimized to maximize the hold time while keeping the mass of the magnet as low as possible. With a 75 gram ferric ammonium alum (FAA) salt pill, we expect a hold time of 12 hours at 50 mK at the projected total heat load of 1 μW. A hold time in the range of a few hours is necessary to facilitate system testing, allow for pre-flight calibration and to accommodate possible launch delays. Micro-X will use a light-weight, low-current superconducting magnet with a maximum field of 4 T at a current of 9.6 A.


As TES detectors are very sensitive to magnetic fields, a magnetic-shielding system is incorporated into the ADR to protect the microcalorimeter array from the strong magnetic field of the superconducting magnet. The magnetic shielding system consists of three stages.

The first stage is a bucking coil, which is wired in series with the main magnet. The second stage consists of a disk of Cryoperm which is positioned between the magnet and the detector region. Cryoperm features a very high permeability at low temperature and is thus ideally suited to direct the field lines away from the sensitive detector region. The third stage of the magnetic shielding system consists of two nested superconducting Nb cans which house the detector front end assembly. External fields are expelled from the volume enclosed by the cans due to the Meissner-Ochsenfeld effect. As field lines tend to penetrate a type 2 superconductor on sharp edges, the corners of the niobium can were rounded.

Simulations show that the residual field inside the Nb can amounts to less than 2 μT when the ADR's magnet is running at full field.

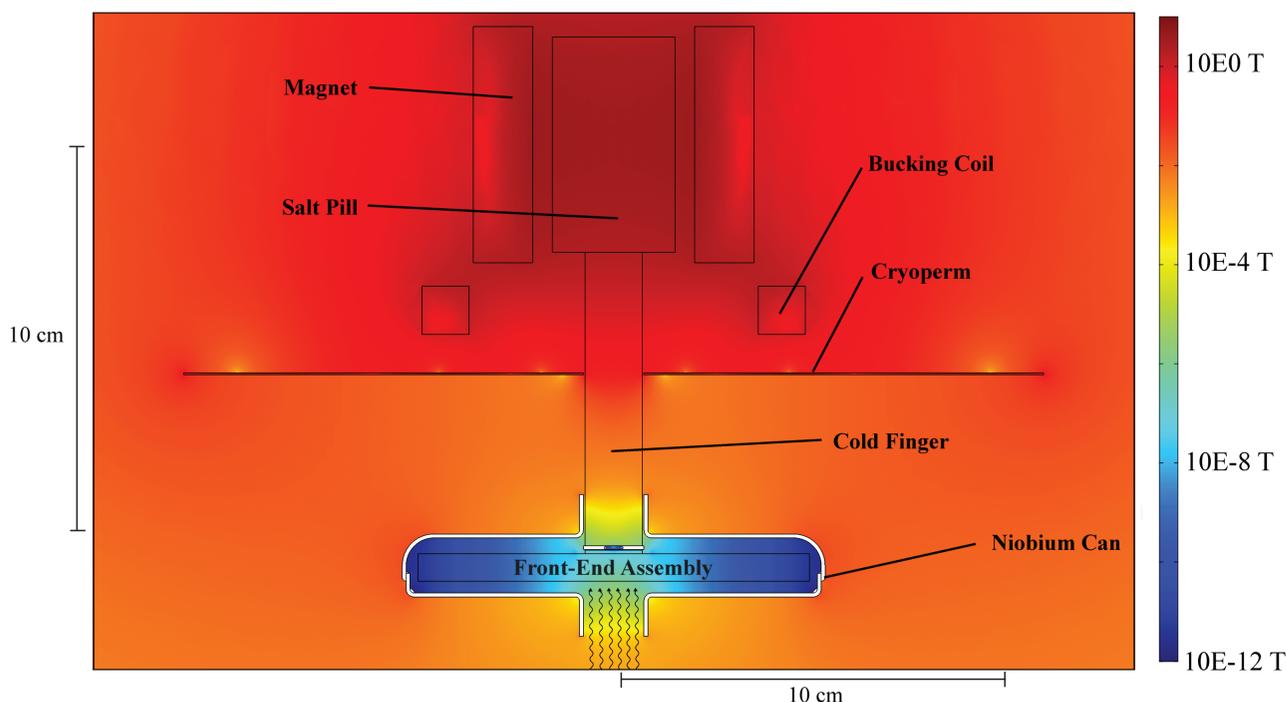

← The magnetic shielding system consists of a bucking coil and two passive shields, one made from Cryoperm, the other from superconducting Nb. The color background shows the magnetic field strength in the different parts of the ADR. The magnetic shielding system reduces the field in the detector region to 2 μT. The maximum field outside the Nb can is 30 mT, a conservative estimate of the quenching field at the operating temperatures. As field lines tend to penetrate a type 2 superconductor on sharp edges, the corners of the niobium can were rounded.

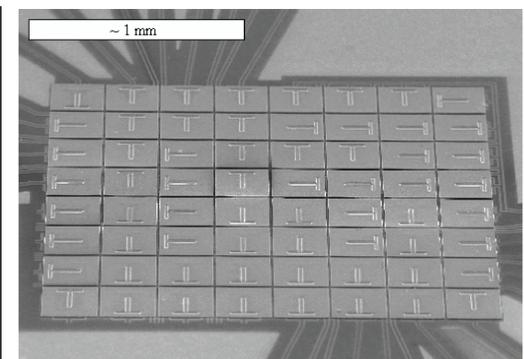

↑ The Micro-X TES array will be fabricated by GSFC. We are now studying a close-packed array very similar to a current GSFC design. Such an array of sixty-four 250 μm pixels is shown in the image above.